


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 11.22 lm/W
MODEL	FW26212424R0015	I _{max} (cd)	2325	S/MH (C0/180)	0.29	
NOMINAL POWER(W)	24	LOR (%)	100.0	S/MH (C90/270)	0.11	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	273.89	□ UP,DN (C0-180)	0.6,68.6	
NOMINAL FLUX(lm)	273.89	CIE CLASS	DIRECT	□ UP,DN (C180-360)	0.8,30.1	
LAMPS INSIDE	1	□ up (%)	1.3	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	24	□ down (%)	98.7	CIBSE SHR MAX	0.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

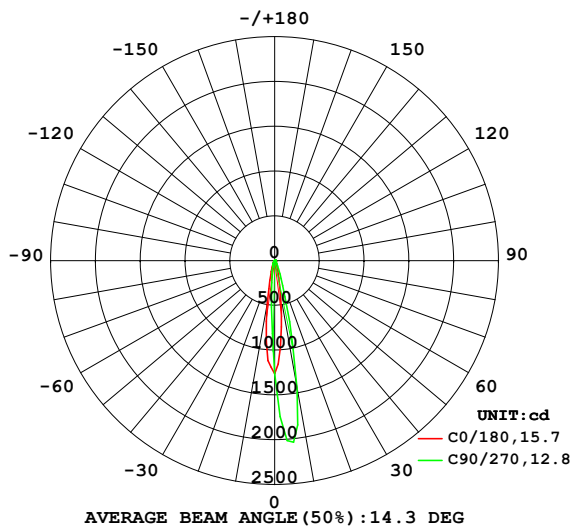

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

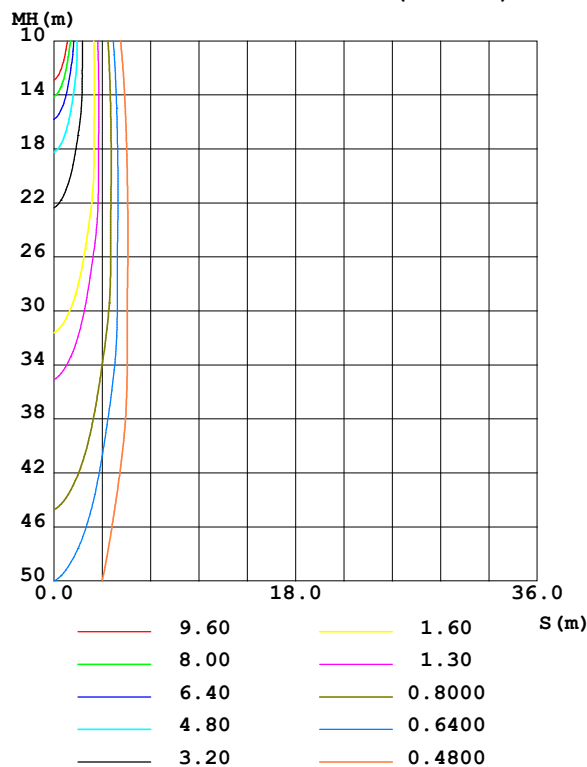

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	380.3	862.5	1457	1508	475.3	242.2	188.9	245.8	0- 10	91.41	91.41	33.4,33.4
20	96.51	147.1	216.5	267.9	101.1	73.29	67.33	91.13	10- 20	82.13	173.5	63.4,63.4
30	40.19	51.94	68.79	89.23	41.25	35.68	33.51	47.89	20- 30	37.01	210.5	76.9,76.9
40	21.50	27.27	34.23	46.02	21.44	18.57	17.69	26.38	30- 40	23.00	233.5	85.3,85.3
50	12.80	15.71	17.53	25.90	12.13	10.91	10.01	16.15	40- 50	15.54	249.1	90.9,90.9
60	8.181	9.689	9.470	15.60	7.414	6.367	5.094	9.537	50- 60	10.53	259.6	94.8,94.8
70	4.733	5.396	5.282	8.785	4.180	3.046	1.878	4.269	60- 70	6.670	266.3	97.2,97.2
80	1.773	2.166	2.259	3.786	1.494	0.4119	0.0431	0.3084	70- 80	3.212	269.5	98.4,98.4
90	0.0812	0.0519	0.1335	0.2509	0.0712	0.0163	0.0024	0.0355	80- 90	0.7195	270.2	98.7,98.7
100	0.0243	0.0265	0.0024	0.0323	0.0244	0.0367	0.0265	0.0710	90-100	0.0461	270.3	98.7,98.7
110	0.0618	0.0590	0.0336	0.0806	0.0600	0.0734	0.0625	0.1291	100-110	0.0596	270.3	98.7,98.7
120	0.1142	0.1038	0.0792	0.1483	0.1068	0.1264	0.1299	0.2195	110-120	0.1011	270.4	98.7,98.7
130	0.2059	0.1791	0.1585	0.2579	0.1837	0.2202	0.2549	0.3907	120-130	0.1572	270.6	98.8,98.8
140	0.4230	0.3358	0.3049	0.4771	0.3525	0.4629	0.5991	0.8528	130-140	0.2565	270.8	98.9,98.9
150	0.9696	0.7795	0.6866	1.048	0.7783	1.081	1.614	2.109	140-150	0.4636	271.3	99.1,99.1
160	2.368	2.104	1.961	2.566	1.847	2.551	3.966	4.831	150-160	0.8215	272.1	99.4,99.4
170	5.077	4.973	4.914	5.893	4.232	4.776	7.182	8.685	160-170	1.127	273.2	99.8,99.8
180	7.143	7.631	8.404	9.924	7.208	7.681	8.457	10.00	170-180	0.6411	273.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 243.58 lm

%lum = 88.9%

%lamp = 88.9%

Conical surface Flux(120deg): 259.62 lm

%lum = 94.8%


%lamp = 94.8%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

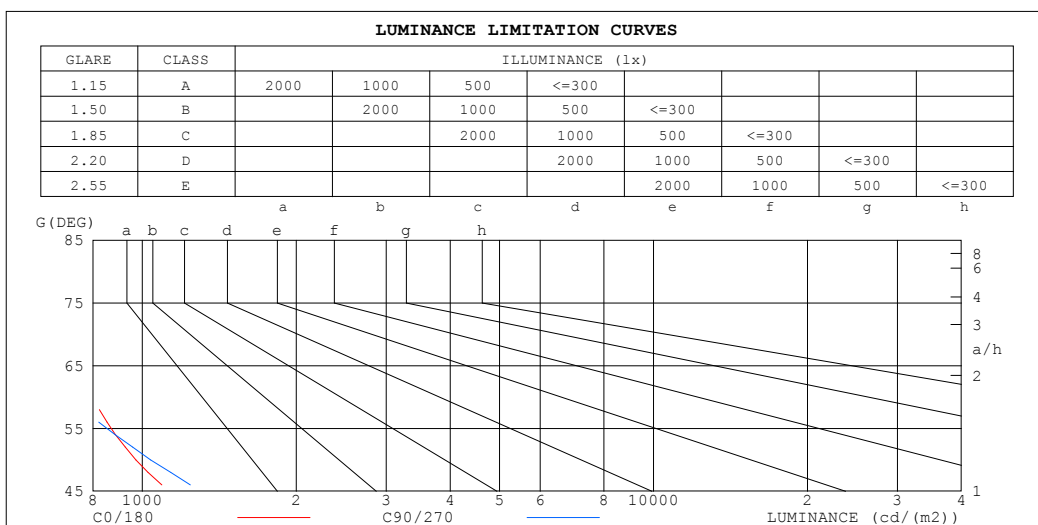


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.11	1.08	1.06	1.09	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.93	.95	.93	.91	.93	.91	.89	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
5.0	.88	.83	.79	.87	.83	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.75
6.0	.84	.79	.76	.84	.79	.75	.82	.78	.75	.81	.77	.74	.79	.76	.74	.72
7.0	.81	.76	.72	.80	.76	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
8.0	.78	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
10.0	.73	.68	.65	.72	.68	.65	.72	.67	.65	.71	.67	.64	.70	.67	.64	.63

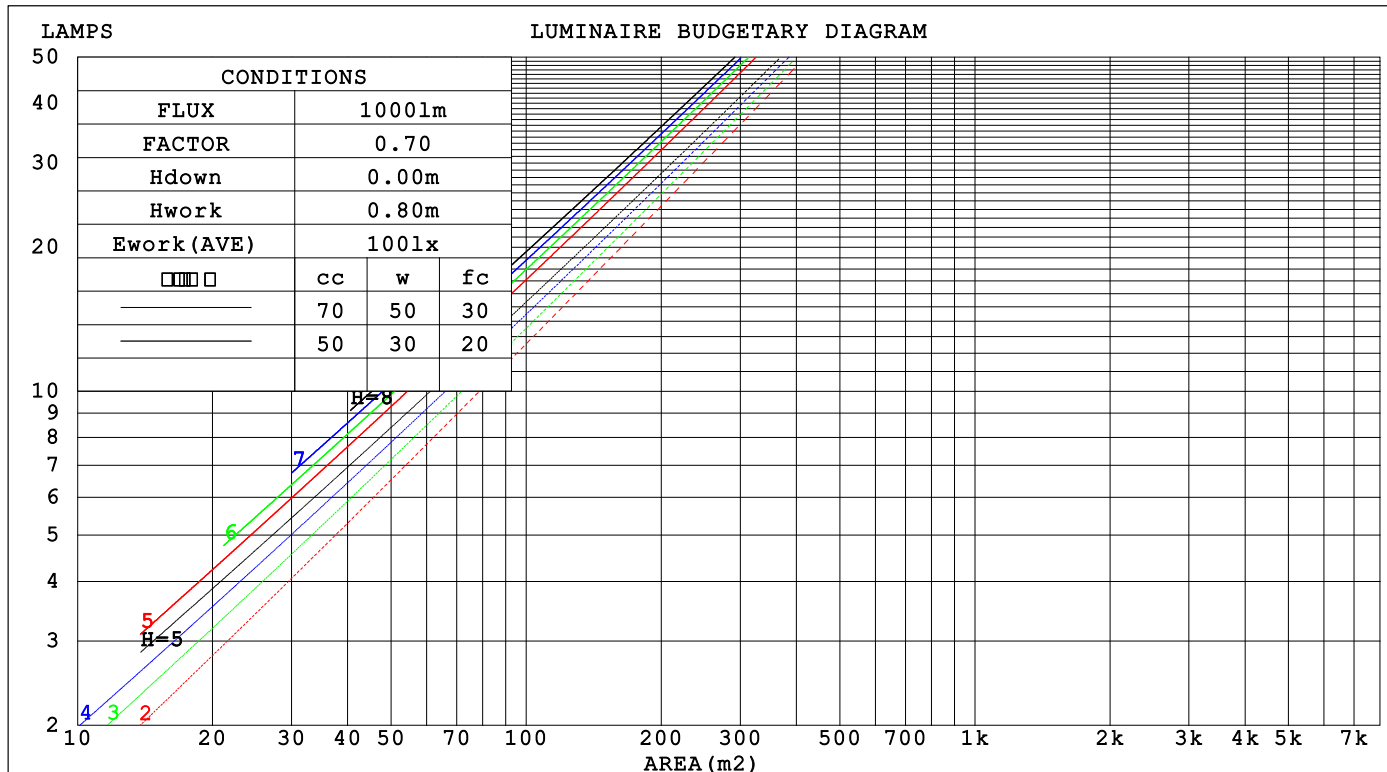

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.170 .097 .031	.163 .093 .030	.150 .086 .027	.138 .079 .025	.126 .073 .024	
2.0	.160 .088 .027	.154 .085 .026	.143 .079 .025	.132 .074 .023	.123 .069 .022	
3.0	.149 .079 .024	.144 .077 .023	.134 .073 .022	.126 .069 .021	.117 .065 .020	
4.0	.139 .072 .021	.135 .071 .021	.127 .067 .020	.119 .064 .019	.112 .061 .019	
5.0	.130 .066 .019	.127 .065 .019	.119 .062 .018	.113 .060 .018	.107 .057 .017	
6.0	.122 .061 .018	.119 .060 .017	.113 .058 .017	.107 .056 .016	.102 .054 .016	
7.0	.115 .057 .016	.113 .056 .016	.107 .054 .016	.102 .052 .015	.097 .050 .015	
8.0	.109 .053 .015	.107 .052 .015	.102 .051 .015	.097 .049 .014	.093 .048 .014	
9.0	.103 .050 .014	.101 .049 .014	.097 .048 .014	.093 .046 .013	.089 .045 .013	
10.0	.098 .047 .013	.096 .047 .013	.092 .045 .013	.089 .044 .013	.085 .043 .012	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.201 .201 .201	.172 .172 .172	.117 .117 .117	.067 .067 .067	.022 .022 .022	
1.0	.181 .168 .156	.155 .144 .134	.106 .099 .093	.061 .057 .054	.020 .018 .017	
2.0	.165 .143 .124	.141 .123 .107	.097 .085 .075	.056 .050 .044	.018 .016 .014	
3.0	.152 .124 .102	.130 .107 .088	.089 .074 .062	.052 .043 .036	.017 .014 .012	
4.0	.140 .109 .085	.120 .094 .074	.083 .066 .052	.048 .038 .031	.015 .013 .010	
5.0	.130 .097 .073	.112 .084 .063	.077 .059 .045	.045 .034 .026	.014 .011 .009	
6.0	.122 .087 .063	.105 .076 .055	.072 .053 .039	.042 .031 .023	.014 .010 .008	
7.0	.114 .080 .055	.098 .069 .048	.068 .048 .034	.040 .029 .020	.013 .009 .007	
8.0	.108 .073 .049	.093 .063 .043	.064 .044 .030	.037 .026 .018	.012 .009 .006	
9.0	.102 .068 .044	.088 .059 .038	.061 .041 .027	.036 .024 .016	.012 .008 .005	
10.0	.097 .063 .040	.084 .055 .035	.058 .038 .025	.034 .023 .015	.011 .007 .005	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: FW26212424R0015					TYPE: FW26212424R0015			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.026*1			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.3	14.1	13.6	14.3	14.5	13.2	14.0	13.5	14.2	14.4	
	3H	14.4	15.2	14.7	15.4	15.6	14.0	14.7	14.3	15.0	
	4H	14.8	15.5	15.1	15.8	16.0	14.3	15.1	14.6	15.3	
	6H	15.1	15.8	15.4	16.0	16.3	14.6	15.3	14.9	15.5	
	8H	15.1	15.8	15.5	16.1	16.4	14.7	15.3	15.0	15.6	
	12H	15.2	15.8	15.5	16.1	16.4	14.7	15.3	15.0	15.6	
4H	2H	13.8	14.5	14.1	14.7	15.0	13.7	14.4	14.0	14.6	
	3H	15.1	15.7	15.4	16.0	16.3	14.6	15.3	15.0	15.6	
	4H	15.6	16.2	16.0	16.5	16.9	15.1	15.7	15.4	16.0	
	6H	16.0	16.5	16.4	16.9	17.2	15.4	15.9	15.8	16.3	
	8H	16.1	16.6	16.5	16.9	17.3	15.5	16.0	16.0	16.4	
	12H	16.1	16.5	16.5	16.9	17.4	15.6	16.0	16.0	16.4	
8H	4H	15.8	16.3	16.2	16.6	17.0	15.3	15.8	15.7	16.1	
	6H	16.3	16.7	16.7	17.1	17.5	15.8	16.1	16.2	16.6	
	8H	16.4	16.8	16.9	17.2	17.7	15.9	16.3	16.4	16.7	
	12H	16.5	16.8	17.0	17.3	17.8	16.0	16.3	16.5	16.8	
12H	4H	15.8	16.2	16.2	16.6	17.0	15.3	15.7	15.7	16.1	
	6H	16.3	16.6	16.8	17.1	17.5	15.8	16.1	16.3	16.6	
	8H	16.5	16.8	17.0	17.2	17.7	16.0	16.3	16.5	16.7	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.6					
1.5H	+ 0.2 / - 0.5					+ 0.5 / - 0.4					
2.0H	+ 0.4 / - 0.7					+ 0.8 / - 0.7					

CIE Pub.117, 273.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.5)
Area: 0.026 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	75	71	82	75	71	81	75	71	67
0.80	90	84	79	89	83	79	88	82	79	74
1.00	95	89	85	94	88	84	92	88	84	79
1.25	100	94	90	99	93	89	96	92	88	84
1.50	103	97	93	101	96	93	99	95	92	86
2.00	106	101	98	105	100	97	101	98	95	89
2.50	108	104	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	102	104	102	99	92
4.00	112	109	107	110	107	105	106	104	102	94
5.00	114	111	109	111	109	107	107	105	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

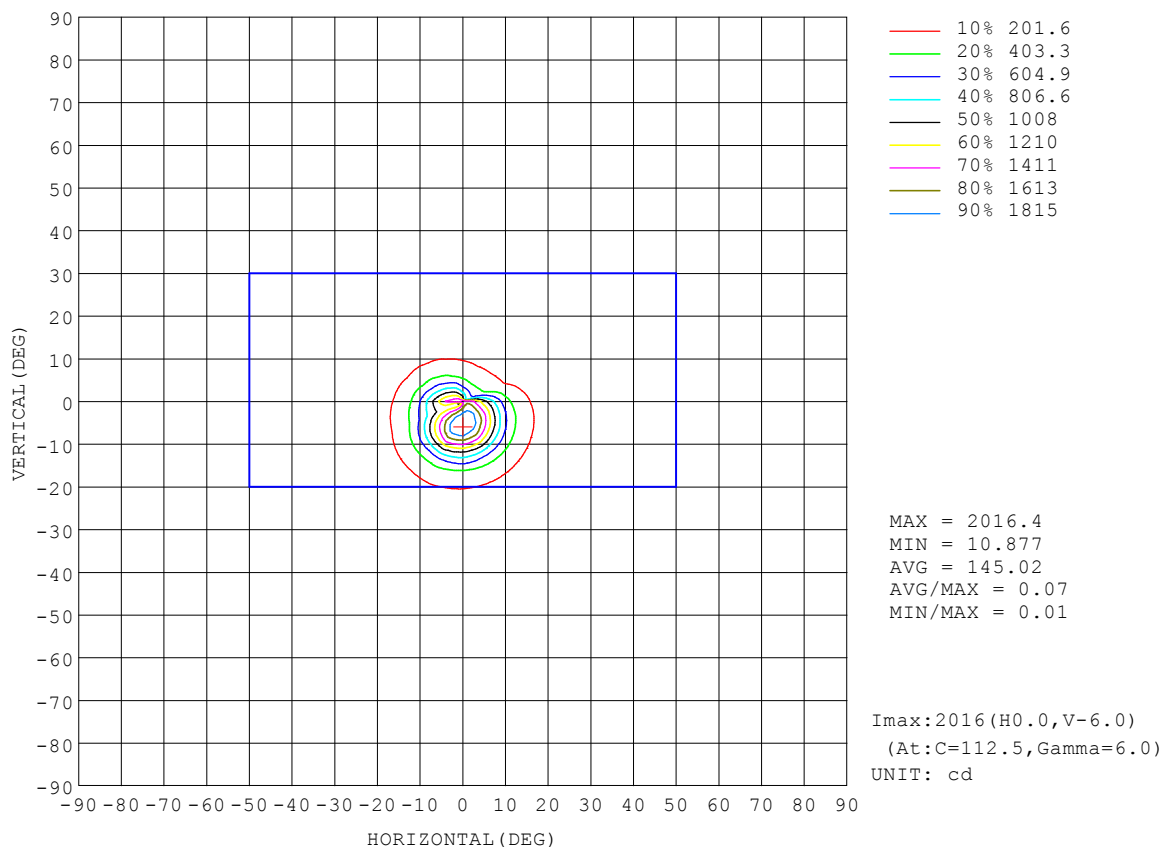


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

AAI Figure

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

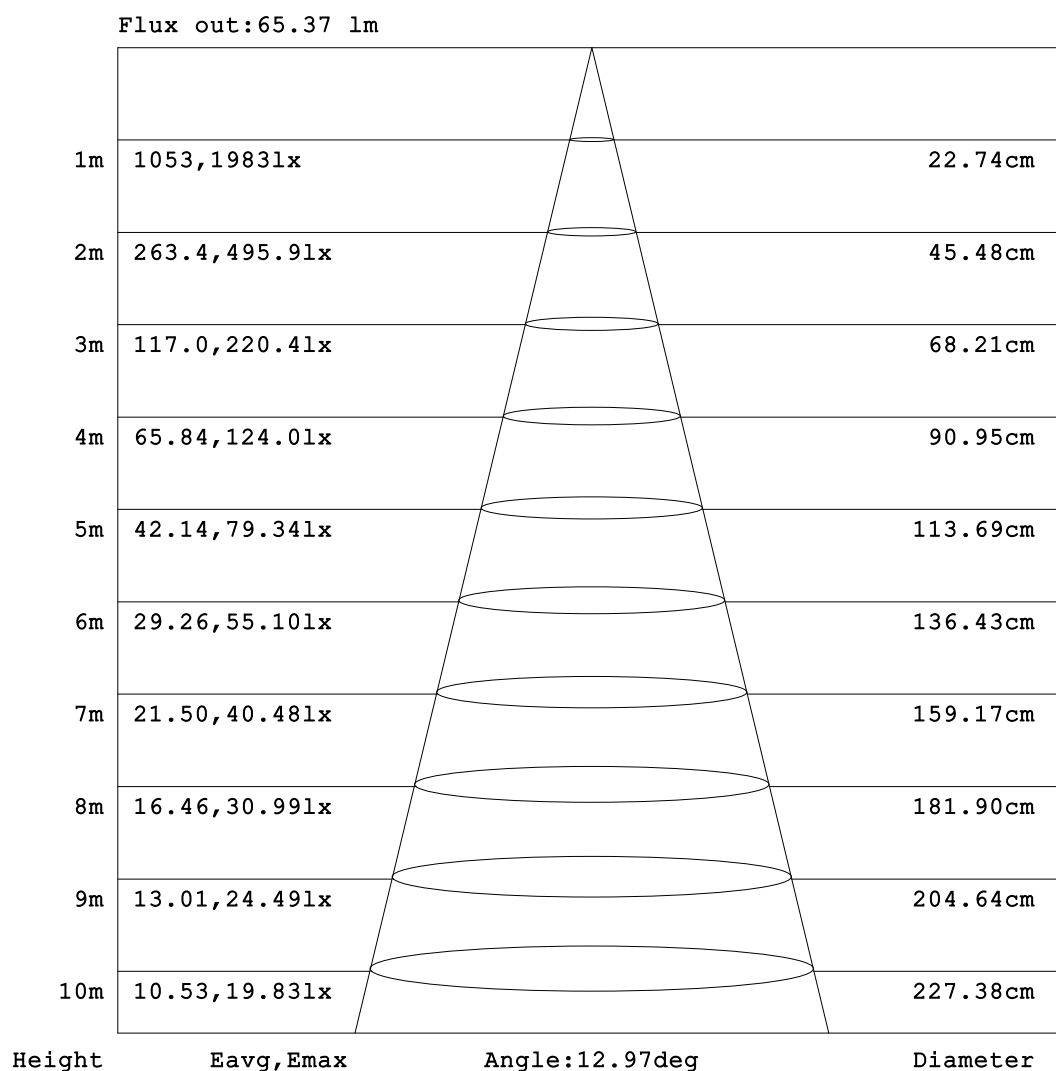


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

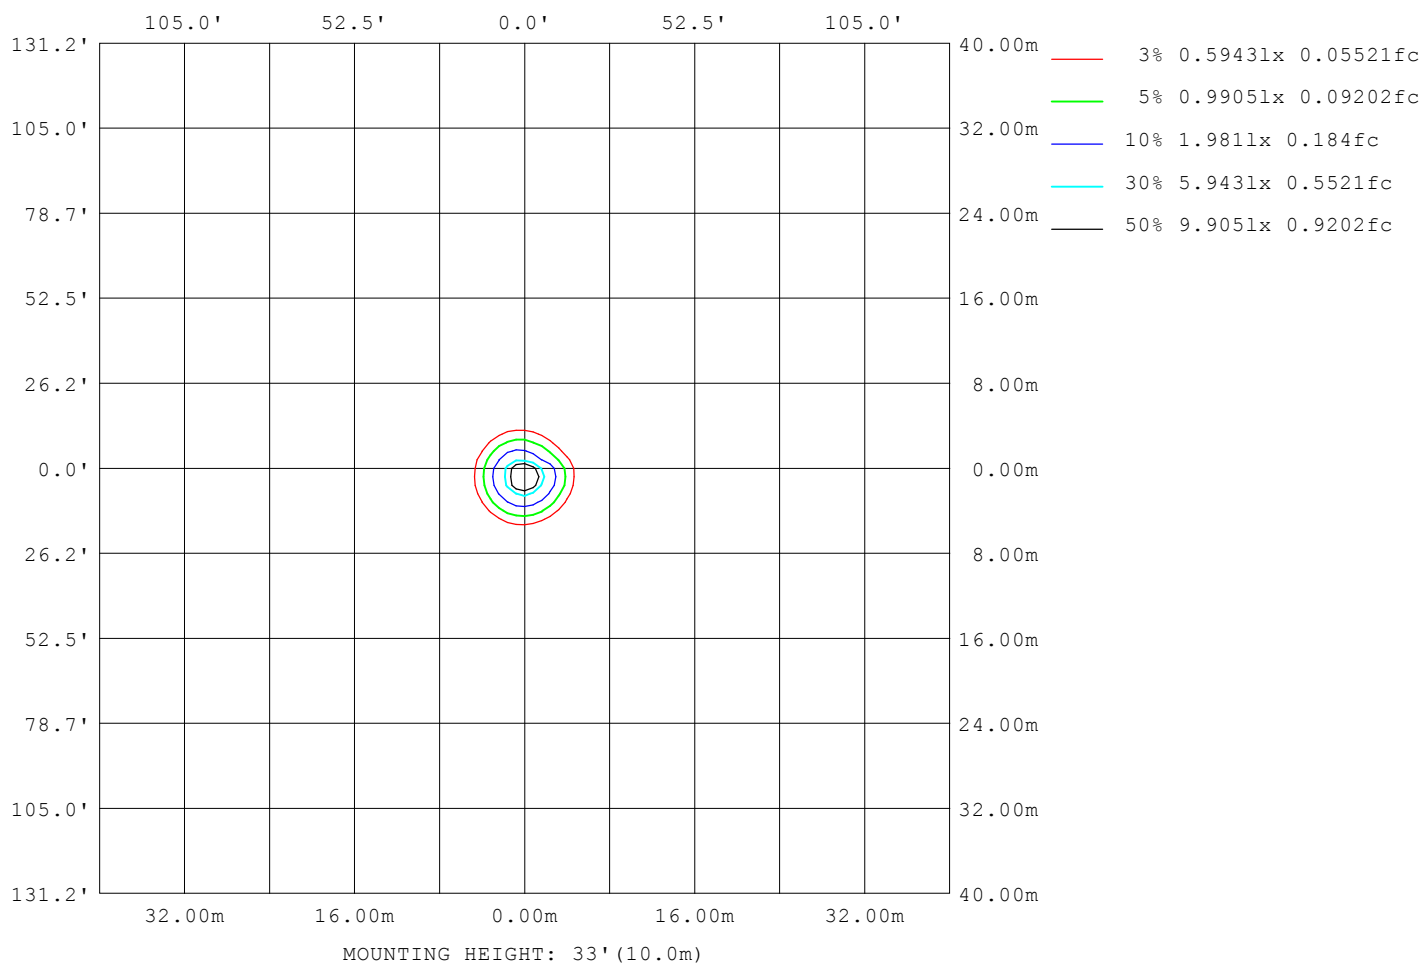

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	550
L_0~180 (75) av	440
L_0~180 (85) av	252
L_90~270 (65) av	474
L_90~270 (75) av	324
L_90~270 (85) av	215
L_45 (65) av	703
L_45 (75) av	493
L_45 (85) av	284

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

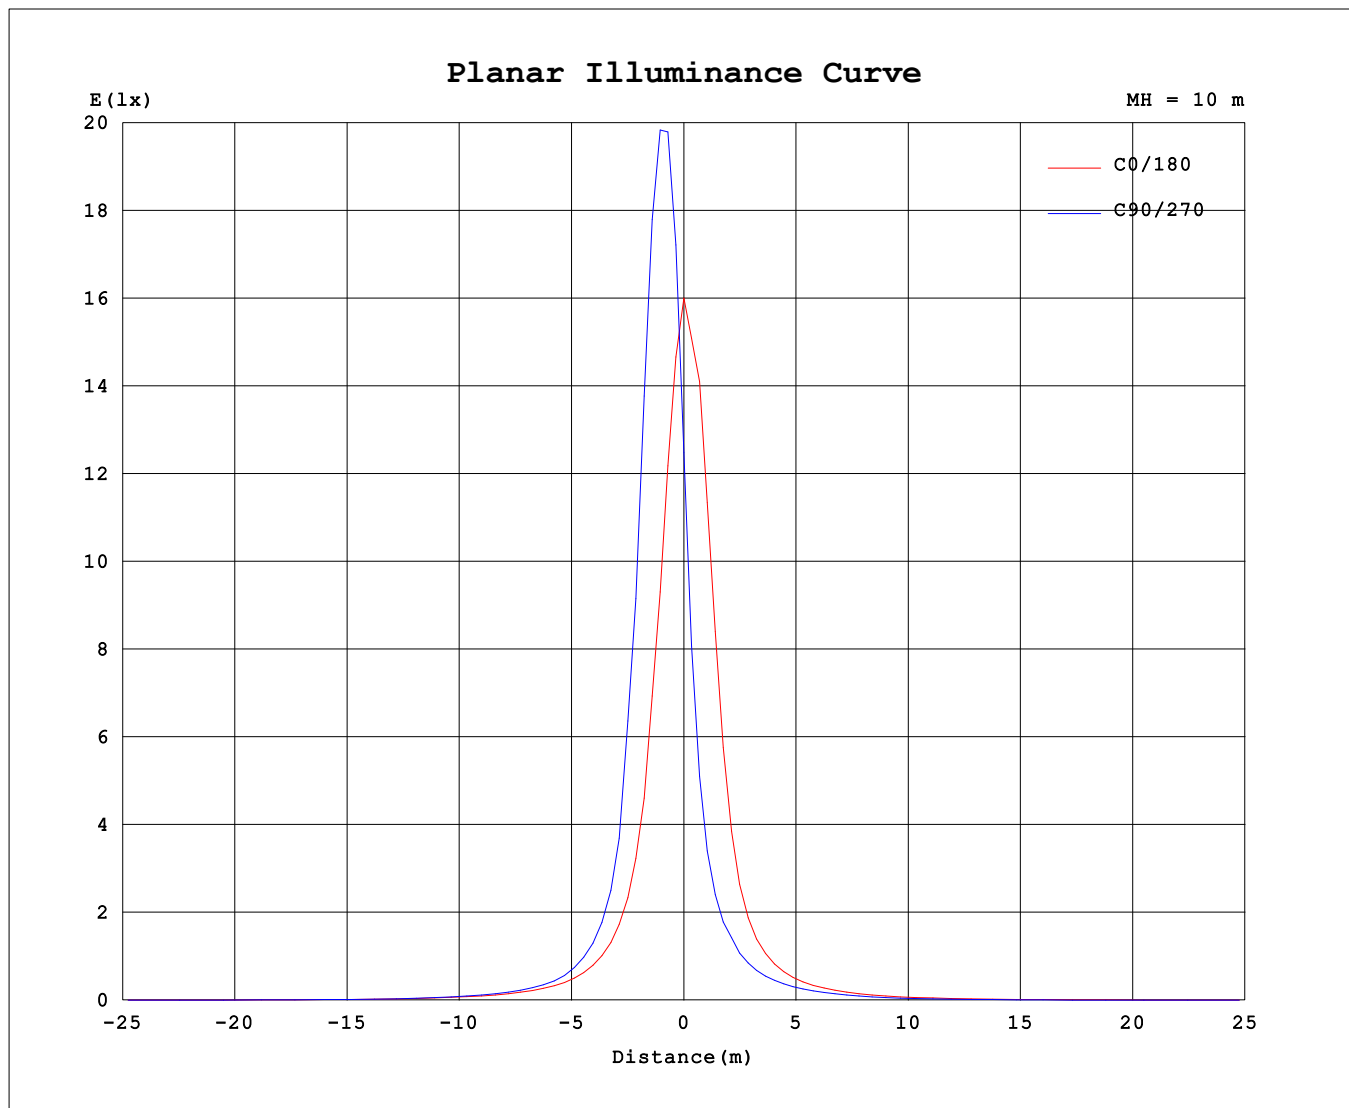

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-16

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: FW26212424R0015	TYPE: FW26212424R0015	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.026*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261	1261			
5	967	1181	1536	1767	2014	2218	2042	1660	1119	885	732	628	519	532	598	743			
10	380	585	862	1171	1457	1756	1508	1085	475	319	242	196	189	207	246	329			
15	201	290	404	519	704	793	748	564	228	164	138	119	119	133	159	211			
20	96.5	126	147	178	217	266	268	239	101	81.2	73.3	67.6	67.3	77.2	91.1	120			
25	65.1	77.2	90.6	107	130	159	163	154	67.3	56.9	52.9	48.7	49.8	57.8	70.0	89.3			
30	40.2	45.5	51.9	58.0	68.8	84.1	89.2	90.2	41.2	37.5	35.7	31.8	33.5	38.5	47.9	62.5			
35	30.8	34.6	39.4	43.3	50.8	62.3	66.5	67.4	31.4	29.4	27.4	24.7	26.1	30.1	37.1	50.0			
40	21.5	24.1	27.3	29.1	34.2	41.8	46.0	46.1	21.4	20.5	18.6	17.3	17.7	21.2	26.4	36.2			
45	17.2	19.4	21.7	22.7	25.9	32.6	36.4	36.4	16.8	16.3	14.8	13.5	13.8	16.7	21.6	29.6			
50	12.8	14.3	15.7	15.8	17.5	22.3	25.9	26.3	12.1	11.9	10.9	9.75	10.01	12.3	16.2	22.4			
55	10.7	11.9	12.9	12.5	13.7	17.7	21.1	21.6	9.93	9.74	8.89	7.86	7.67	9.76	13.20	18.7			
60	8.18	9.13	9.69	8.92	9.47	12.5	15.6	16.3	7.41	7.18	6.37	5.31	5.09	6.53	9.54	13.92			
65	6.74	7.57	7.86	7.06	7.44	9.86	12.67	13.48	6.03	5.70	4.97	3.94	3.73	4.79	7.38	11.10			
70	4.73	5.43	5.40	4.92	5.28	6.86	8.79	9.70	4.18	3.68	3.05	2.13	1.88	2.44	4.27	7.20			
75	3.48	4.05	4.01	3.72	4.03	5.27	6.60	7.35	3.02	2.46	1.83	1.11	0.86	1.14	2.36	4.73			
80	1.77	2.14	2.17	2.06	2.26	3.05	3.79	3.96	1.49	0.95	0.41	0.11	0.04	0.06	0.31	1.66			
85	0.82	1.04	1.07	1.05	1.21	1.70	2.10	2.06	0.68	0.27	0.03	0.01	0.00	0.01	0.03	0.30			
90	0.08	0.07	0.05	0.07	0.13	0.23	0.25	0.22	0.07	0.04	0.02	0.00	0.00	0.01	0.04	0.11			
95	0.07	0.06	0.02	0.00	0.01	0.01	0.02	0.08	0.06	0.06	0.02	0.01	0.01	0.02	0.05	0.14			
100	0.02	0.07	0.03	0.01	0.00	0.01	0.03	0.10	0.02	0.06	0.04	0.03	0.03	0.04	0.07	0.15			
105	0.04	0.08	0.04	0.02	0.01	0.02	0.05	0.11	0.04	0.07	0.05	0.04	0.04	0.06	0.09	0.15			
110	0.06	0.09	0.06	0.04	0.03	0.05	0.08	0.12	0.06	0.09	0.07	0.06	0.06	0.09	0.13	0.18			
115	0.08	0.10	0.08	0.05	0.05	0.07	0.11	0.17	0.07	0.10	0.09	0.08	0.08	0.11	0.16	0.21			
120	0.11	0.13	0.10	0.08	0.08	0.10	0.15	0.23	0.11	0.13	0.13	0.12	0.13	0.17	0.22	0.26			
125	0.14	0.16	0.13	0.11	0.11	0.13	0.18	0.28	0.13	0.14	0.16	0.15	0.17	0.22	0.27	0.29			
130	0.21	0.21	0.18	0.16	0.16	0.19	0.26	0.37	0.18	0.20	0.22	0.23	0.25	0.33	0.39	0.40			
135	0.27	0.26	0.23	0.20	0.20	0.25	0.32	0.45	0.23	0.26	0.29	0.30	0.35	0.45	0.51	0.55			
140	0.42	0.38	0.34	0.30	0.30	0.37	0.48	0.65	0.35	0.40	0.46	0.51	0.60	0.76	0.85	0.87			
145	0.58	0.52	0.46	0.41	0.41	0.50	0.64	0.87	0.48	0.55	0.65	0.75	0.90	1.15	1.23	1.20			
150	0.97	0.87	0.78	0.69	0.69	0.84	1.05	1.41	0.78	0.88	1.08	1.30	1.61	2.04	2.11	1.96			
155	1.38	1.26	1.16	1.04	1.04	1.24	1.49	1.98	1.09	1.23	1.53	1.88	2.33	2.88	2.96	2.71			
160	2.37	2.21	2.10	1.95	1.96	2.22	2.57	3.27	1.85	2.02	2.55	3.18	3.97	4.83	4.83	4.32			
165	3.31	3.16	3.03	2.85	2.86	3.20	3.63	4.50	2.60	2.76	3.40	4.31	5.48	6.58	6.44	5.69			
170	5.08	5.04	4.97	4.80	4.91	5.43	5.89	6.77	4.23	4.33	4.78	5.57	7.18	8.50	8.68	8.02			
175	6.38	6.36	6.46	6.44	6.71	7.34	7.64	8.61	5.61	5.74	6.11	6.38	7.30	8.67	9.62	9.82			
180	7.14	7.26	7.63	7.93	8.40	9.13	9.92	11.16	7.21	7.21	7.68	7.88	8.46	9.08	10.00	11.09			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-16

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: