


**CUSTOM MADE  
IN BRISBANE**

# GLOPRO-1010

## FEATURES

- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, black finish
- Environmental protection grade silicone material
- Integrated extrusion molding process
- Unique optical light distribution structure design, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkali and UV resistance;
- Excellent toughness, simple and stylish appearance, delicate and unique;
- 5 years warranty, working life  $\geq 30000$  hours

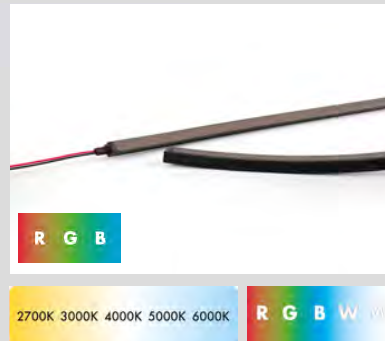

**IP67**  
Waterproof Grade

UV Protection

Resistant Saltwater

Resistant to solvents

**24V**  
DC

5 YEAR WARRANTY

## SPECIFICATION

### Basic Parameters

Size	10mm x 10mm x 10,000mm (or custom)
Input Voltage	DC24V
Input Current	
Max Power	10W/1m or 50W/5m
Lifetime	>30,000 hours
LED per/m	
Contionuous Max Run	10 metres
Colour / CCT	2700K,3000K,4000K,6500K,RGB,RGB+CCT
Bin Step (SDCM)	
IP Rating	IP67
CRI	>90
Energy Efficiency Class	>A+
Warranty	5 years / 30,000 hours
Cutting Increment	
Control	Phase-cut, leading & trailing / 0-10V / 1-10V / DMX / DALI
Beam Angle	60°, 90°, 170°, Beam


### Product Ordering

CODE	COLOUR	LM/M	STOCKED
GLOPRO-24-1010-2700-67	2700K	820	YES
GLOPRO-24-1010-3000-67	3000K	900	YES
GLOPRO-24-1010-4000-67	4000K	980	YES
GLOPRO-24-1010-6500-67	6500K	1000	YES
GLOPRO-24-1010-RGB-67	RGB	620-630nm	S/O
GLOPRO-24-1010-RGB+CCT-67	RGB+CCT	520-530nm	S/O

S/O: Special Order

Standard length supplied with single end 2000mm IP67 cable

### Technical Diagram

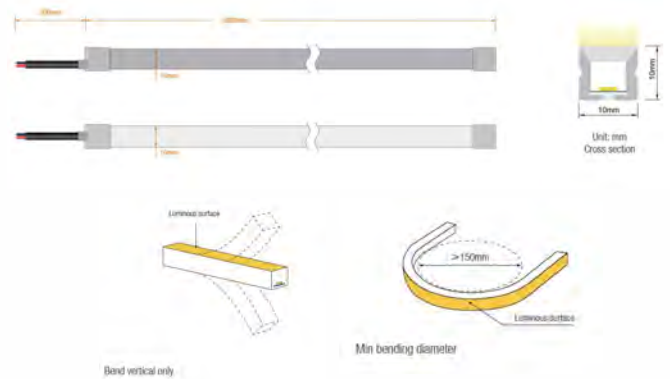

### Recommended Solution/ Accessories

#### TRANSFORMERS

GSTRAN-60-24-C  
Non-dimmable  $\leq 5m$



PDV-75-24  
dimmmable  $\leq 5m$




PDV-150-24  
dimmmable  $\leq 10m$




#### PROFILES

GLOPRO-1010A-1000  
1000mm, aluminium profile



GLOPRO-1010P-1000  
1000mm, PC profile



GLOPRO-1010A-20  
20mm, aluminium clip

