




ALIGN 7080

FEATURES

- Versatile commercial lighting system that combines custom design with high-performance LED and optic technology
- Custom diameters, radii, and lengths to turn custom lighting concepts into reality.
- Maintains light uniformity and aesthetic across standard straight and custom feature areas.
- Available with integrated DALI
- Supplied custom made for plug and play installation
- 10 year warranty

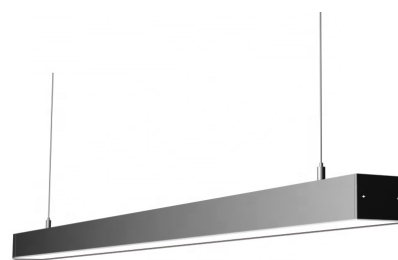

SPECIFICATION

BASIC PARAMETERS

Size	70mm x 80mm
Input Voltage	DC24V
Lumen Output	2000lm/m
Max Power	20W/1m
Lifetime	L80 B10 or 72,000h
Colour / CCT	3000K/4000K
Driver	Internal or External
IP Rating	IP44
CRI	80
Finish	Aluminium / Black / White / Custom
Control	Option of DALI 2 / Trailing Edge / Non-dimmable
Beam Angle	105°
Mounting	Surface Mount or Suspension

PRODUCT ORDERING

CODE	COLOUR	KELVIN	STOCKED
ALIGN-7080-3000-B	BLACK	3000K	S/O
ALIGN-7080-3000-W	WHITE	3000K	S/O
ALIGN-7080-3000-ALU	ALUMINIUM	3000K	S/O
ALIGN-7080-4000-B	BLACK	4000K	S/O
ALIGN-7080-4000-W	WHITE	4000K	S/O
ALIGN-7080-4000-ALU	ALUMINIUM	4000K	S/O

Technical Diagrams

