

COMMERCIAL CYLINDER CEILING SERIES



DESIGN FEATURES


- IP66 ingress protection suitable for most applications
- Recessed light source for minimal glare UGR<19
- High lumen output for commercial installations (Corridor, Office, Retail)
- Suitable for high ceilings (Airports, Railway Stations)
- 90 lm/W system power
- Replaceable lower cones (white, black, silver, gold)
- High quality aluminium materials for heat conduction and anti-corrosion
- Double layer polyester powder paint (salt spray fog resistant)
- Bridgelux / CREE / Citizen COB LEDs for maximum brightness
- Available in Black (RAL9005) or White (RAL9016)
- 5 Years warranty

TECHNICAL FEATURES

- Convection cooling with no fan noise or maintenance
- Available in 20W / 30W / 40W / 47W / 57W
- Dimmable via DALI option
- Wide input range 120V - 277V 50*60Hz
- CCT 2700K / 3000K / 4000K / 5000K
- Color rendering index Ra>80
- Luminous flux 1800lm / 2700lm / 3600lm / 4230lm / 5800lm
- Beam angle 20° / 40° / 55°
- Diameter 95mm / 115mm / 140mm / 170 mm / 205 mm
- Height 152mm / 152mm / 162mm / 182mm / 212mm
- Conform with EN60598-2-3:2003+A1:2011 standard

MOUNTING OPTIONS

Fixed ceiling light

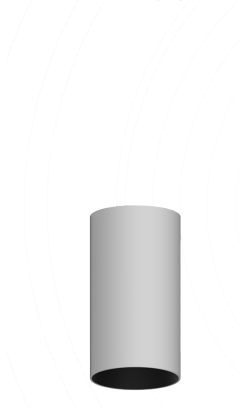


Pendant with stem



Pendant with cable



DETAILS

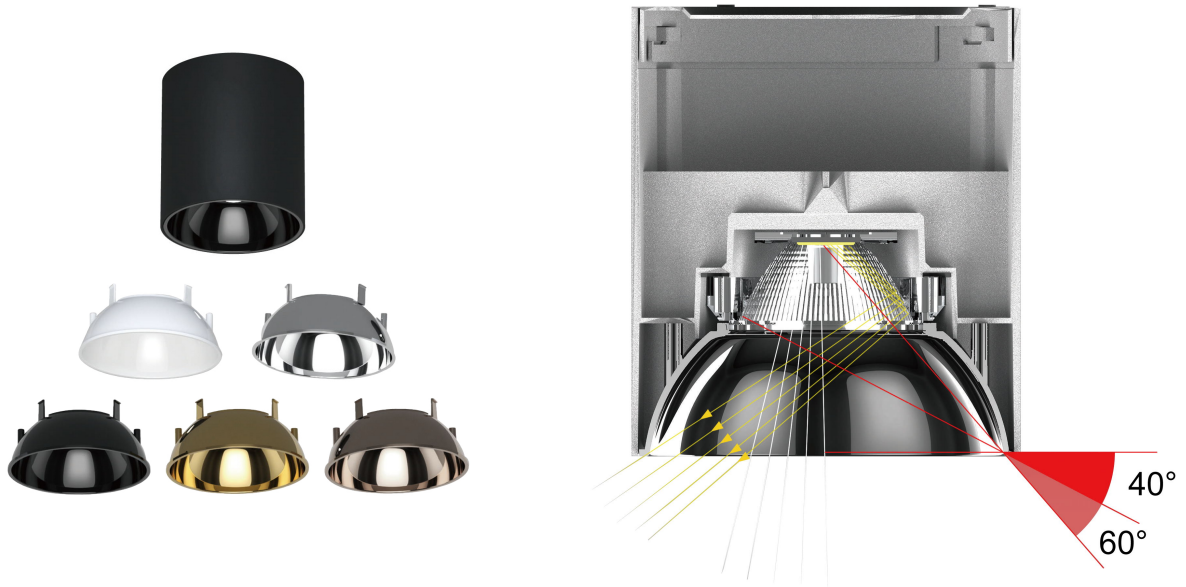

APPLICATION

