

**CUSTOM MADE  
IN BRISBANE**

# GLOPRO-3D1010

## FEATURES

- Made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP67 protection level, salt solution resistance, acids & alkali and UV resistance.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- Combine with top bend and side bend, to meet the request of the different space bend.
- 5 years warranty, working life ≥30000 hours.



- UV Protection
- Resistant Saltwater
- Resistant to solvents

## SPECIFICATION

### Basic Parameters


Size	10mm x 10mm x 10,000mm (or custom)
Input Voltage	DC24V
Input Current	
Max Power	10W/1m or 50W/5m
Lifetime	>30,000 hours
LED per/m	
Continuous Max Run	10 metres
Colour / CCT	2700K,3000K,4000K,6500K,RGB,RGB+CCT
Bin Step (SDCM)	1 bin 2-step Mac Adam Ellipse 67
IP Rating	>IP67
CRI	>90
Energy Efficiency Class	>A+
Warranty	5 years / 30,000 hours
Cutting Increment	
Control	Phase cut (leading & trailing)/0-10V/ 1-10V/DMX/DALI
Beam Angle	60°, 90°, 170°, Beam

### Product Ordering

	COLOUR	LM/M	STOCKED
GLOPRO-24-3D1010-2700-67	2700K	464	YES
GLOPRO-24-3D1010-3000-67	3000K	486	YES
GLOPRO-24-3D1010-4000-67	4000K	506	YES
GLOPRO-24-3D1010-6500-67	6500K	493	YES
GLOPRO-24-3D1010-RGB-67	RGB		S/O
GLOPRO-24-3D1010-RGB+CCT-67	RGB+CCT		S/O

S/O: Special Order  
Standard length supplied with single end 2000mm IP67 cable

### Technical Diagrams

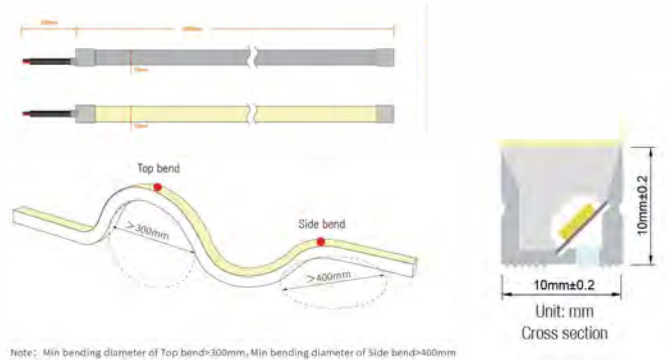

Note: Min bending diameter of Top bend>300mm, Min bending diameter of Side bend>400mm

### Recommended Solution/ Accessories

#### TRANSFORMERS

- GSTRAN-60-24-C Non-dimmable, <5m
- PDV-75-24 dimmable, <5m
- PDV-150-24 dimmable, <10m

#### PROFILES

- GLOPRO-1010A-1000 (1000mm) (aluminium) [12.4mm width, 18mm height]
- GLOPRO-1010P-1000 (1000mm) (PC profile) [12mm width, 14.3mm height]

