



GLOPRO SAUNA 0612

FEATURES

- Made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength
- Environmental protection grade silicone material, integrated extrusion molding process
- Unique optical light distribution structure design, uniform lighting surface and no shadow
- IP44/IP67 protection level, salt solution resistance, acids & alkali and UV resistance
- Dust-free matte finish, Using Lumileds LEDs, the SDCM of finished product can be minimized to 3 steps
- 5 years warranty, working life ≥ 50000 hours



SPECIFICATION

Basic Parameters


Specification

Size	6mm (W) x 12mm (H)
Input Voltage	DC24V
Max Power	10W/1m
Lumen (per/m)	428 / 430 / 431
Efficiency (lumen per/w)	42.8 / 43 / 43.1
Colour / CCT	2700K / 3000K / 4000K
Cutting Increment	50mm
IP Rating	IP67
CRI	≥ 90
Finish	White
LED Pin Temperature	Max 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Product Ordering

CODE	COLOUR	LM/M	STOCKED
GLOPRO-24-SAUNA -0612-2700-67-W	2700K	428	S/O
GLOPRO-24-SAUNA -0612-3000-67-W	3000K	430	S/O
GLOPRO-24-SAUNA -0612-4000-67-W	4000K	431	S/O

Technical Diagram

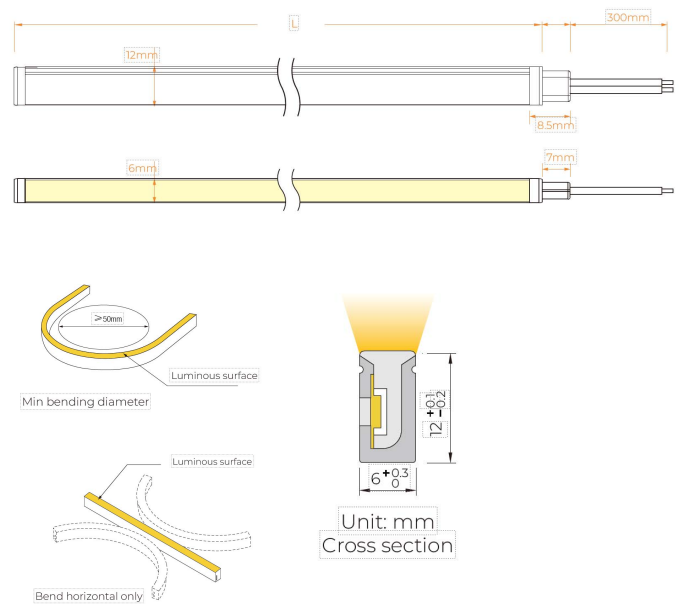

Recommended Accessories

GLOPRO-24-SAUNA-0612A-1000
Aluminium profile
1000(±5)x8x13mm(L x W x H)



GLOPRO-24-SAUNA-0612A-15
Aluminium mounting clips
15x8x13mm(L x W x H)



GLOPRO-24-SAUNA-0612SS-15
Stainless steel mounting clips
15x7.2x12.8mm(L x W x H)

