

# GLOPRO SAUNA 1220

## FEATURES

- Made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength.
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP67 protection level, salt solution resistance, acids & alkali, corrosive gases, fire and UV
- Dust-free matte finish, Using Lumileds LEDs, the SDCM of finished product can be minimized to 3 steps.
- 5 years warranty, working life  $\geq 50000$  hours;



## SPECIFICATION


### Basic Parameters

Specification	
Size	12mm (W) x 20mm (H)
Input Voltage	DC24V
Max Power	10W/1m
Lumen (per/m)	589 / 607 / 626 / 584
Efficiency (lumen per/w)	58.9 / 60.7 / 62.6 / 58.4
Colour / CCT	2700K / 3000K / 4000K / 6500K
Cutting Increment	50mm
IP Rating	IP67
CRI	$\geq 90$
Finish	White
LED Pin Temperature	Max 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

### Product Ordering


CODE	COLOUR	LM/M	STOCKED
GLOPRO-24-SAUNA -1220-2700-67-W	2700K	589	S/O
GLOPRO-24-SAUNA -1220-3000-67-W	3000K	607	S/O
GLOPRO-24-SAUNA -1220-4000-67-W	4000K	626	S/O
GLOPRO-24-SAUNA -1220-6500-67-W	6500K	584	S/O

### Technical Diagram

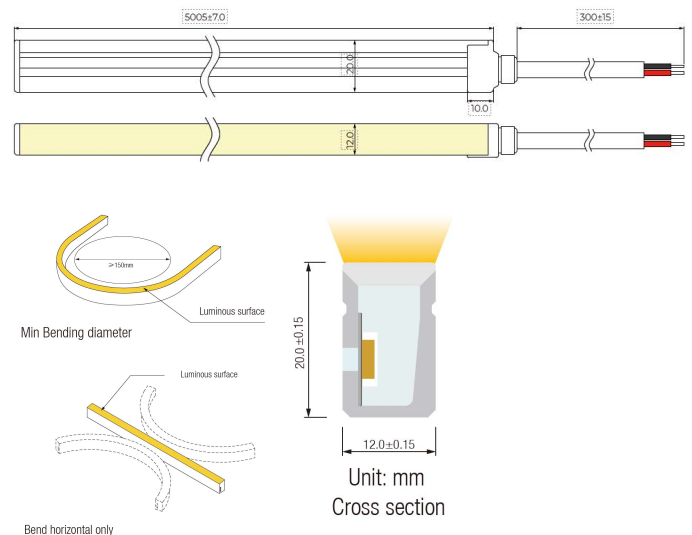


### Recommended Accessories

**GLOPRO-24-SAUNA-1220A-1000**  
Aluminium profile  
1000(±5) x 14 x 23.9mm (L x W x H)



**GLOPRO-24-SAUNA-1220A-20**  
Aluminium mounting clips  
20 x 17.5 x 22.9mm (L x W x H)



**GLOPRO-24-SAUNA-1220SS-20**  
Stainless steel mounting clips  
20 x 12.8 x 20.9mm (L x W x H)

