


GLOPRO SAUNA 1615

FEATURES

- Made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength.
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP67 protection level, salt solution resistance, acids & alkali and UV resistance.
- Dust-free matt finish, Using Lumileds LEDs, the SDCM of finished product can be minimized to 3 steps.
- 5 years warranty, working life ≥ 50000 hours.



SPECIFICATION




Basic Parameters

Specification	
Size	16mm (W) x 15mm (H)
Input Voltage	DC24V
Max Power	10W/1m
Lumen (per/m)	857 / 889 / 904 / 904
Efficiency (lumen per/w)	85.7 / 88.9 / 90.4 / 90.4
Colour / CCT	2700K / 3000K / 4000K / 6500K
Cutting Increment	50mm
IP Rating	IP67
CRI	≥ 90
Finish	White
LED Pin Temperature	Max 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	-25°C~ 45°C

Product Ordering


CODE	COLOUR	LM/M	STOCKED
GLOPRO-24-SAUNA -1615-2700-67-W	2700K	831	S/O
GLOPRO-24-SAUNA -1615-3000-67-W	3000K	868	S/O
GLOPRO-24-SAUNA -1615-4000-67-W	4000K	904	S/O
GLOPRO-24-SAUNA -1615-6500-67-W	6500K	904	S/O

Technical Diagram

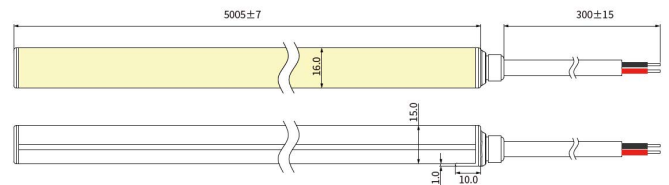


Recommended Accessories

GLOPRO-24-SAUNA-1615A-1000
Aluminium profile
1000(±5)x18.1 x 18.9mm (L x W x H)



GLOPRO-24-SAUNA-1615A-20
Aluminium mounting clip
20(±5)x20.5x17.6mm(L x W x H)



GLOPRO-24-SAUNA-1615M
Moldable profile
51.4x30.4x15mm (L x W x H)

