



NERO-25



FEATURES

- Unique optical light distribution structure design, 360° emitting uniform without shadow.
- IP65 protection level with integrated extrusion molding process, high light transmittance, environment-friendly silicone material.
- Excellent toughness, stylish appearance, elegant design
- Salt resistance, acid & alkali corrosion resistance, UV and fire resistance.
- Ambient temperature: -25°C - 60°C; Storage temperature: 0°C - 60°C.

2700K 3000K 4000K 5000K 6000K

UV Protection

Resistant to solvents

Resistant Saltwater

IP65
Waterproof Grade

5 YEAR WARRANTY

24V
DC

SPECIFICATION

Basic Parameters

Size	25mm (R) x 5000mm (or custom)
Input Voltage	DC24V
Input Current	
Max Power	10W/1m or 50W/5m
Lifetime	>30,000 hours
LED per/m	
Continuous Max Run	5 metres / custom
Colour / CCT	2700K, 3000K, 4000K, 6000K, RGB, CCT
Bin Step (SDCM)	
IP Rating	>IP65
CRI	>90
Energy Efficiency Class	>A+
Warranty	5 years or 30,000 hours
Cutting Increment	
Control	Phase-cut leading & trailing / 0-10V / 1-10V / PWM / DMX / DALI




Product Ordering

CODE	COLOUR	LM/M	STOCKED
NERO-24-25-2700-65	2700K	517	YES
NERO-24-25-3000-65	3000K	529	YES
NERO-24-25-4000-65	4000K	556	YES
NERO-24-25-6000-65	6000K	586	YES
NERO-24-25-RGB-65	RGB	248	S/O
NERO-24-25-CCT-65	CCT	517	S/O

S/O: Special Order

Standard length supplied with single end 2000mm IP67 cable

Technical Diagrams

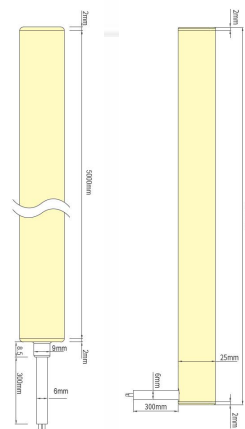

Recommended Solution/ Accessories

TRANSFORMERS

PDV-75-24
dimmable, <5m



PDV-150-24
dimmable, <10m



PROFILES

NERO25-1A01
Transparent mounting clips



NERO25-1A02
Transparent mounting profile



NERO25-1A03
Transparent hanging clips



NERO25-1A04
Transparent hanging profile

