




GLT51S3x-PRO

FEATURES

- Operates on AC220-240V (50/60Hz) power supply
- 900mA LED current with 35-37V output
- Available beam angles: 12°, 24°, 36°, and 60° for flexible light distribution
- Long-lasting performance with >50,000-hour lifespan (L80 – B10 at 25°C)
- Wide operating temperature range from -20°C to 40°C
- Durable construction with a weight of 1.36kg

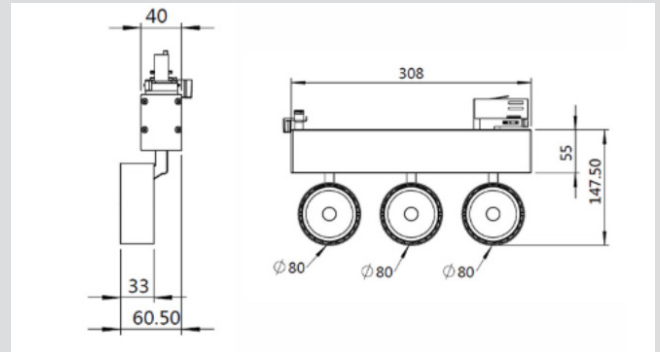


Basic Parameters

LED current	900mA, 35-37V
Input Voltage	AC220~240V 50/60Hz
Beam Angle	12°/24°/36°/60°
Luminaire Lifetime	L80, 50.000H, (Ta=25°C)
Operating temperature	-20°C~40°C
Weight	1.36kg

Ordering Information

Power	CRI	Beam Angle	Luminous(lm)	CCT
3x12W	>80	12°	3×1200 lm	3000K
			3×1300 lm	4000K
		24°	3×1200 lm	3000K
			3×1300 lm	4000K
		36°	3×1200 lm	3000K
			3×1300 lm	4000K
	>90	12°	3×1050 lm	3000K
		24°	3×1080 lm	3000K
		36°	3×1100 lm	3000K

TECHNICAL DIAGRAMS

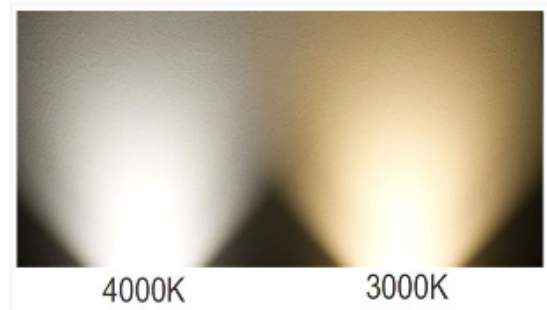

FIXTURES

